


Carmen

8024.01 - 8024.09

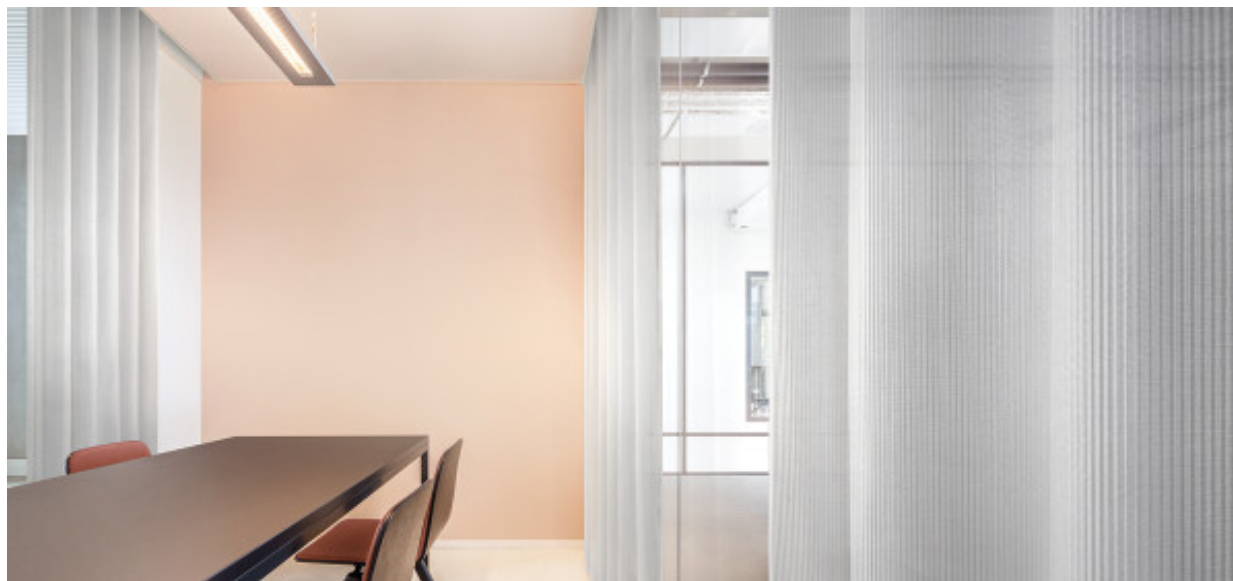

产品
窗帘

描述

3-dimensional rib lengthwise with the brilliance of melting ice

成分

100% 阻燃聚酯纤维

宽幅

± 150 cm, ± 59 inches

重量

± 136 gr/m², ± 4 oz/yd¹

吸声降噪

ISO 354, alpha w

0.50 (pleated)

ASTM C423, nrc

0.30

视觉及热舒适控制

EN 410/EN 14501

Test available

阻燃

NFPA 701 (meth. 1 or 2) , Pass

EN 13773 , Class 1

BS 5867-2 , Type C

NF P 92/503-507 , M1

DIN 4102 , B1

Übereinstimmung , Pass

UNI VF 8456-8457 , Classe 1

CAN/ULC S109 , Pass

IMO 2010 FTP part 7 , Pass

耐摩擦褪色

ISO 105-X12

wet 4-5 (scale 1-5) / dry 4-5 (scale 1-5)

AATCC 8 (solids)

wet 5 (scale 1-5) / dry 5 (scale 1-5)

耐光照褪色

ISO 105-B02

5 (scale 1-8)

AATCC 16.2 option 1 or 16.3 opt 3

4 (scale 1-5)


标签



USCG -
EU MRA
0038



STANDARD
100
507-0023
Hohenstein HTTI



Vescom B.V.

P.BAY26
170927

Hoch
Fladungen

Baustoffklasse schwerentflammbar
DIN 4102, B1

保养与维护




收缩率

Shrinkage 30° warp -0.3% / weft -0.3%


Shrinkage 70° warp -0.6% / weft -0.4%

Carmen

8024.01 - 8024.09



8024.01



8024.02




8024.03




8024.04



8024.05




8024.06



8024.07



8024.08



8024.09