


# Delos

8082.01 - 8082.24

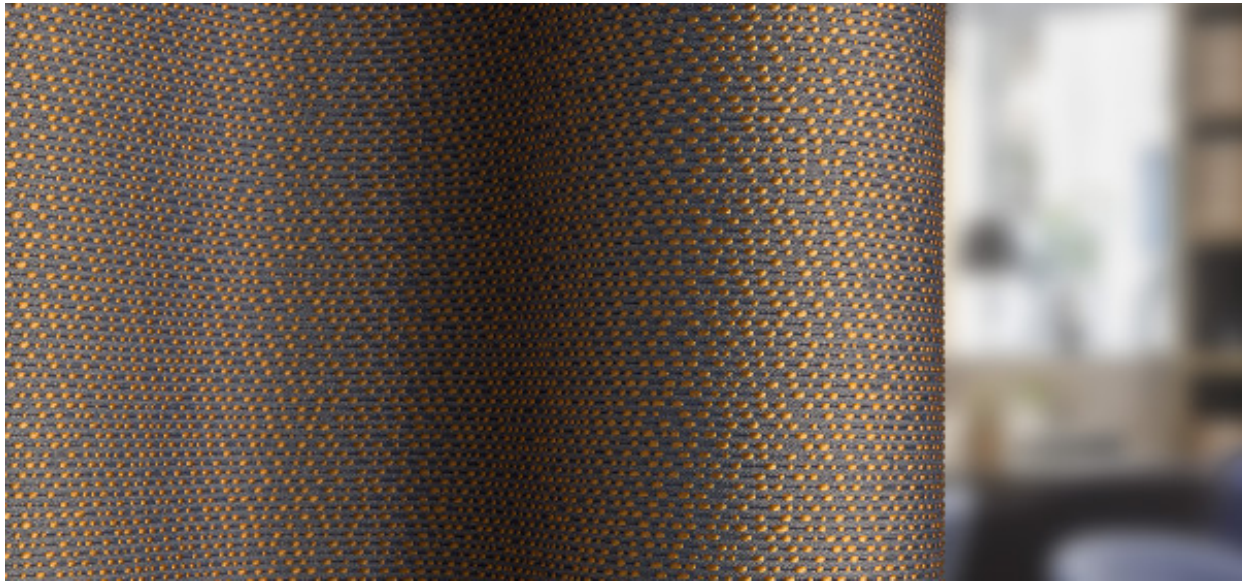

product  
**Curtain**

description  
**Allover 3D structured weave with a two-tonal coloured, sheen yarn effect**

composition  
**32% recycled polyester FR / 68% polyester FR**

width  
**± 136 cm, ± 54 inches**

weight  
**± 354 gr/m<sup>2</sup>, ± 11 oz/yd<sup>1</sup>**

visual & thermal comfort  
**EN 410/EN 14501**  
Test available


flame retardant  
**NFPA 701 (meth. 1 or 2) , Pass**  
**EN 13773 , Class 1**  
**BS 5867-2 , Type C**  
**NF P 92/503-507 , M1**  
**DIN 4102 , B1**  
**Übereinstimmung , Pass**  
**UNI VF 8456-8457 , Classe 1**  
**CAN/ULC S109 , Pass**  
**IMO 2010 FTP part 7 , Pass**

colorfastness crocking  
**ISO 105-X12**  
wet 4-5 (scale 1-5) / dry 4-5 (scale 1-5)  
**AATCC 8 (solids)**  
wet 5 (scale 1-5) / dry 5 (scale 1-5)

colorfastness to light  
**ISO 105-B02**  
6 (scale 1-8)  
**AATCC 16.2 option 1 or 16.3 opt 3**  
4.5 (scale 1-5)

seam slippage  
**ISO 13936-2**  
warp 3.6 mm / weft 3.6 mm  
**ASTM D434**  
warp 46 lbs / weft 65 lbs

labels



Baustoffklasse schwerentflammbar  
DIN 4102, B1

care




Shrinkage  
Shrinkage 70° - warp -2.1%  
Shrinkage 70° - weft -1.5%


# Delos

8082.01 - 8082.24


---




8082.01




8082.02



8082.03




8082.04




8082.05



8082.06




8082.07




8082.08




8082.09




8082.10




8082.11




8082.12



8082.13



8082.14




8082.15




8082.16




8082.17



8082.18




8082.19




8082.20




8082.21



8082.22



8082.23



8082.24