


Moroni+Print

8062.01

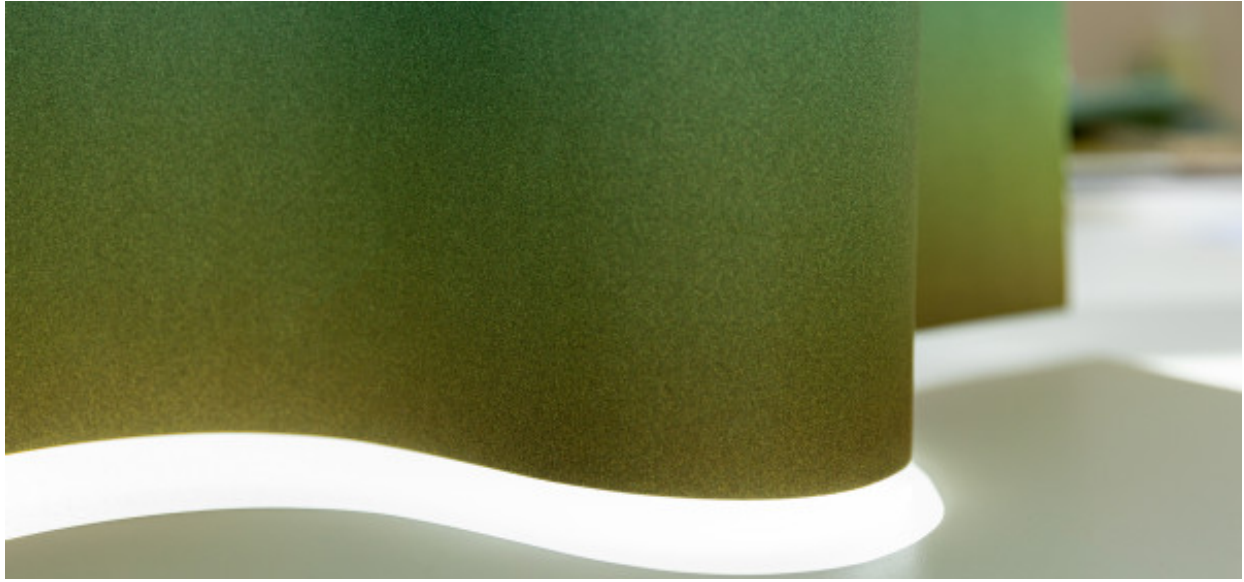

Produit

Tissus pour rideaux

Description

Rideau imprimable occultant uni finement tissé

Composition

100% polyester acrylic coating

Largeur

± 285 cm, ± 112 inches

Poids

± 700 gr/m², ± 23 oz/yd¹

Confort Visuel & Thermique

EN 410/EN 14501

Test available

AATCC 148

Test available

Non feu

NFPA 701 (meth. 1 or 2) , Pass

EN 13773 , Class 1

BS 5867-2 , Type B

NF P 92/503-507 , M1

DIN 4102 , B1

Übereinstimmung , Pass

UNI VF 8456-8457 , Classe 1

CAN/ULC S109 , Pass

IMO 2010 FTP part 7 , Pass

Résistance au frottement

ISO 105-X12

wet 4 (scale 1-5) / dry 4 (scale 1-5)

AATCC 8 (solids)

wet 4.5 (scale 1-5) / dry 4.5 (scale 1-5)

Solidité lumière

ISO 105-B02

5-6 (scale 1-8)

AATCC 16.2 option 1 or 16.3 opt 3


3.5 (scale 1-5)

Résistance au glissement à la couture

ASTM D434

warp 66 lbs / weft 47 lbs

Étiquettes



Baustoffklasse schwerentflammbar
DIN 4102, B1

Entretien & Maintenance



Rétrécissement

Shrinkage 30° warp -1.6% / weft -0.6%

Shrinkage 70° warp -2% / weft -0.8%

Moroni+Print

8062.01



8062.01