


Naltar

8083.01 - 8083.16

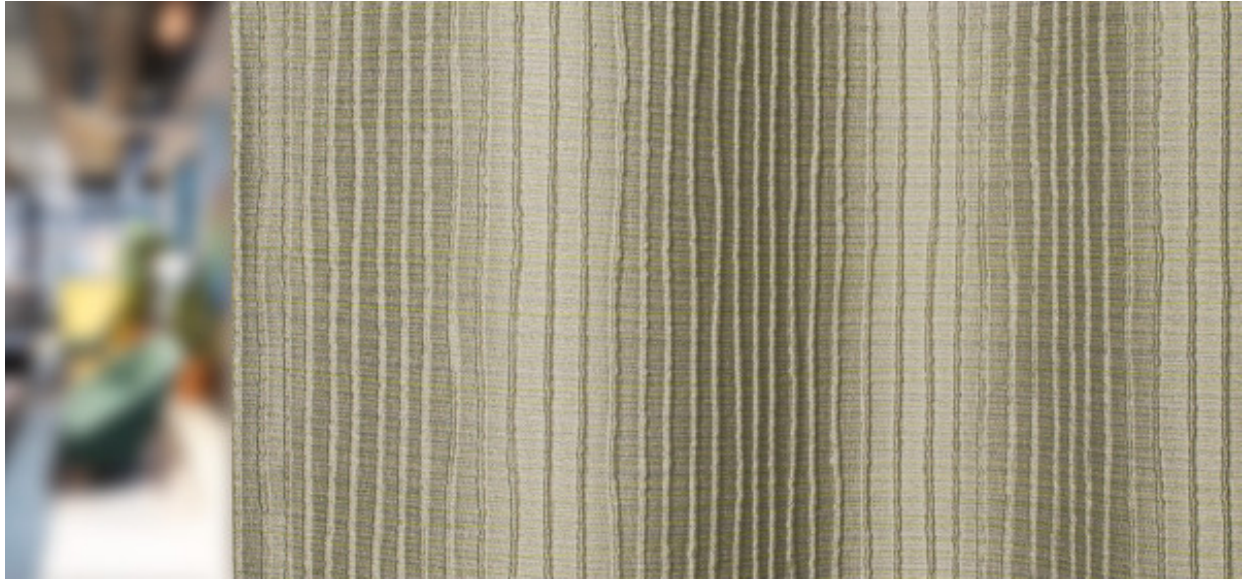

product
Curtain

description
Double weave with a vertical organic 3D rib structure in tonal shades

composition
100% flame retardant polyester

width
± 144 cm, ± 57 inches

weight
± 273 gr/m², ± 9 oz/yd¹

sound absorption
ISO 354, alpha w
0.50 (pleated)

visual & thermal comfort
EN 410/EN 14501
Test available


flame retardant
NFPA 701 (meth. 1 or 2) , Pass
EN 13773 , Class 1
BS 5867-2 , Type C
NF P 92/503-507 , M1
DIN 4102 , B1
Übereinstimmung , Pass
UNI VF 8456-8457 , Classe 1
CAN/ULC S109 , Pass
IMO 2010 FTP part 7 , Pass

colorfastness crocking
ISO 105-X12
wet 4-5 (scale 1-5) / dry 4-5 (scale 1-5)
AATCC 8 (solids)
wet 5 (scale 1-5) / dry 5 (scale 1-5)

colorfastness to light
ISO 105-B02
6 (scale 1-8)
AATCC 16.2 option 1 or 16.3 opt 3
5 (scale 1-5)

seam slippage
ISO 13936-2
warp 2.5 mm / weft 2.7 mm
ASTM D434
warp 29 lbs / weft 29 lbs

labels



Baustoffklasse schwerentflammbar
DIN 4102, B1

care




Naltar

Shrinkage


8083.01 - 8083.16

Shrinkage 70° - weft -1.4%


Shrinkage 70° - weft +1.5%



8083.01




8083.02



8083.03




8083.04




8083.05



8083.06




8083.07




8083.08




8083.09




8083.10




8083.11



8083.12



8083.13



8083.14



8083.15



8083.16