


# Nila+Print

8064.01

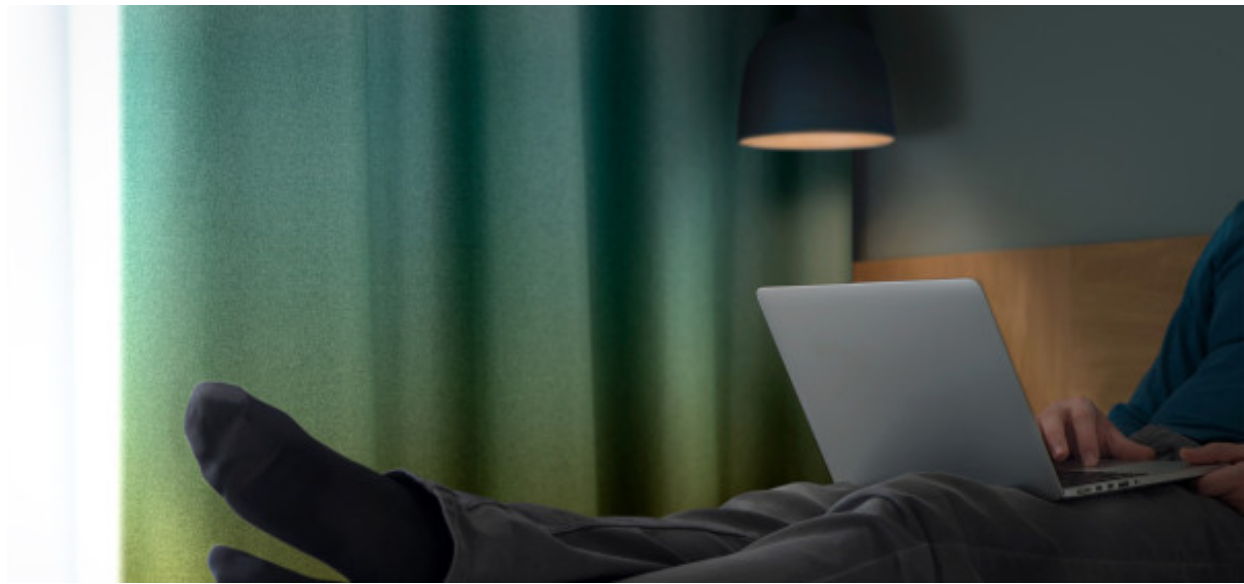

product  
**Curtain**

description  
**Matte, unstructured floor-to-ceiling  
curtain+print black out**

composition  
**100% flame retardant polyester acrylic coating**

width  
**± 280 cm, ± 110 inches**

weight  
**± 778 gr/m<sup>2</sup>, ± 25 oz/yd<sup>1</sup>**

visual & thermal comfort  
**EN 410/EN 14501**

Test available  
**AATCC 148**  
Test available

flame retardant  
**NFPA 701 (meth. 1 or 2) , Pass**  
**EN 13773 , Class 1**  
**BS 5867-2 , Type B**  
**DIN 4102 , B1**  
**Übereinstimmung , Pass**  
**UNI VF 8456-8457 , Classe 1**  
**CAN/ULC S109 , Pass**  
**IMO 2010 FTP part 7 , Pass**

colorfastness crocking

**ISO 105-X12**  
wet 4-5 (scale 1-5) / dry 4-5 (scale 1-5)  
**AATCC 8 (solids)**  
wet 5 (scale 1-5) / dry 5 (scale 1-5)


colorfastness to light

**ISO 105-B02**  
5 (scale 1-8)  
**AATCC 16.2 option 1 or 16.3 opt 3**  
4.5 (scale 1-5)

seam slippage

**ASTM D434**  
warp 48 lbs / weft 53 lbs

labels



Baustoffklasse schwerentflammbar  
DIN 4102, B1

care




Shrinkage

Shrinkage 30° warp -1% / weft -0.5%  
Shrinkage 70° warp -1.2% / weft -0.4%

# Nila+Print

8064.01

---



8064.01